




REPLACEMENT SHEET

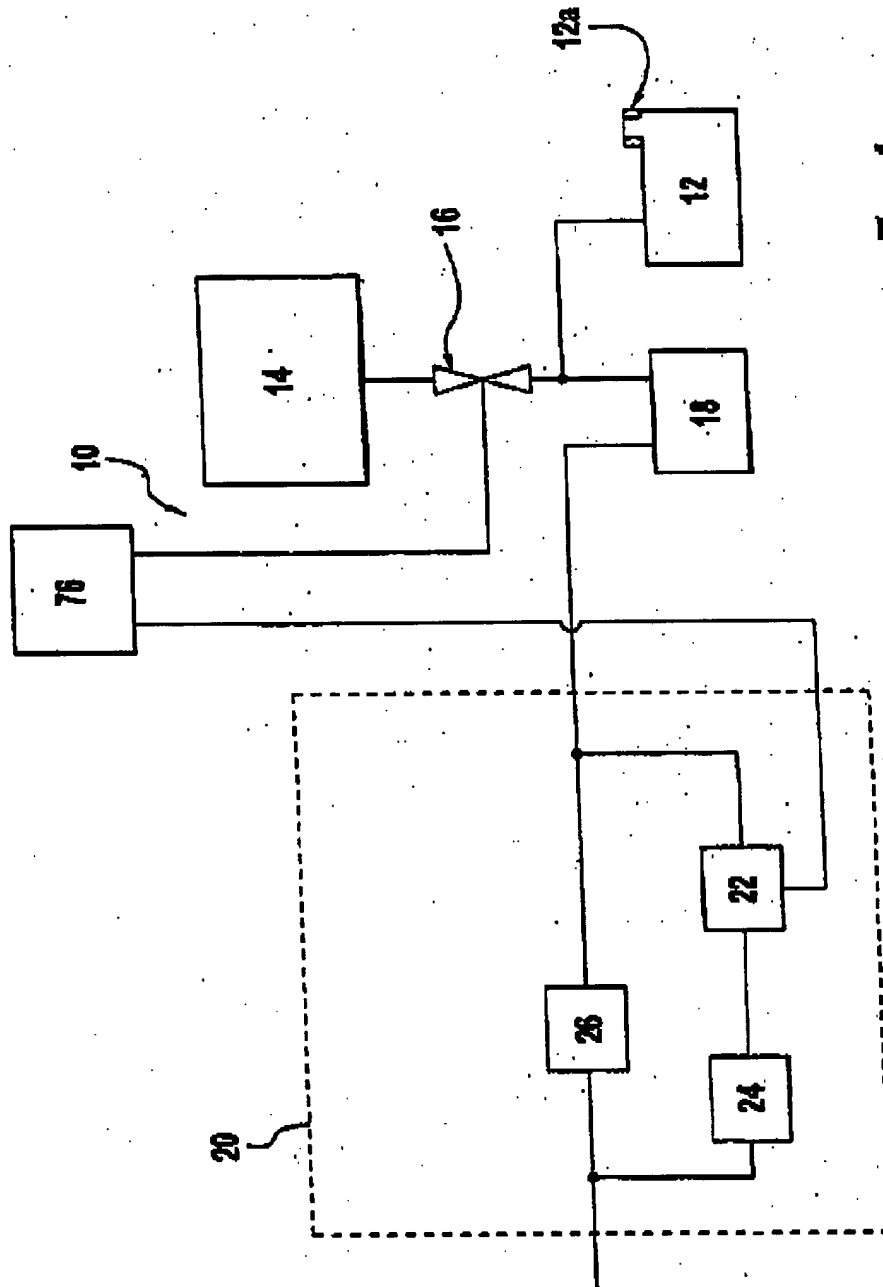

REPLACEMENT SHEET

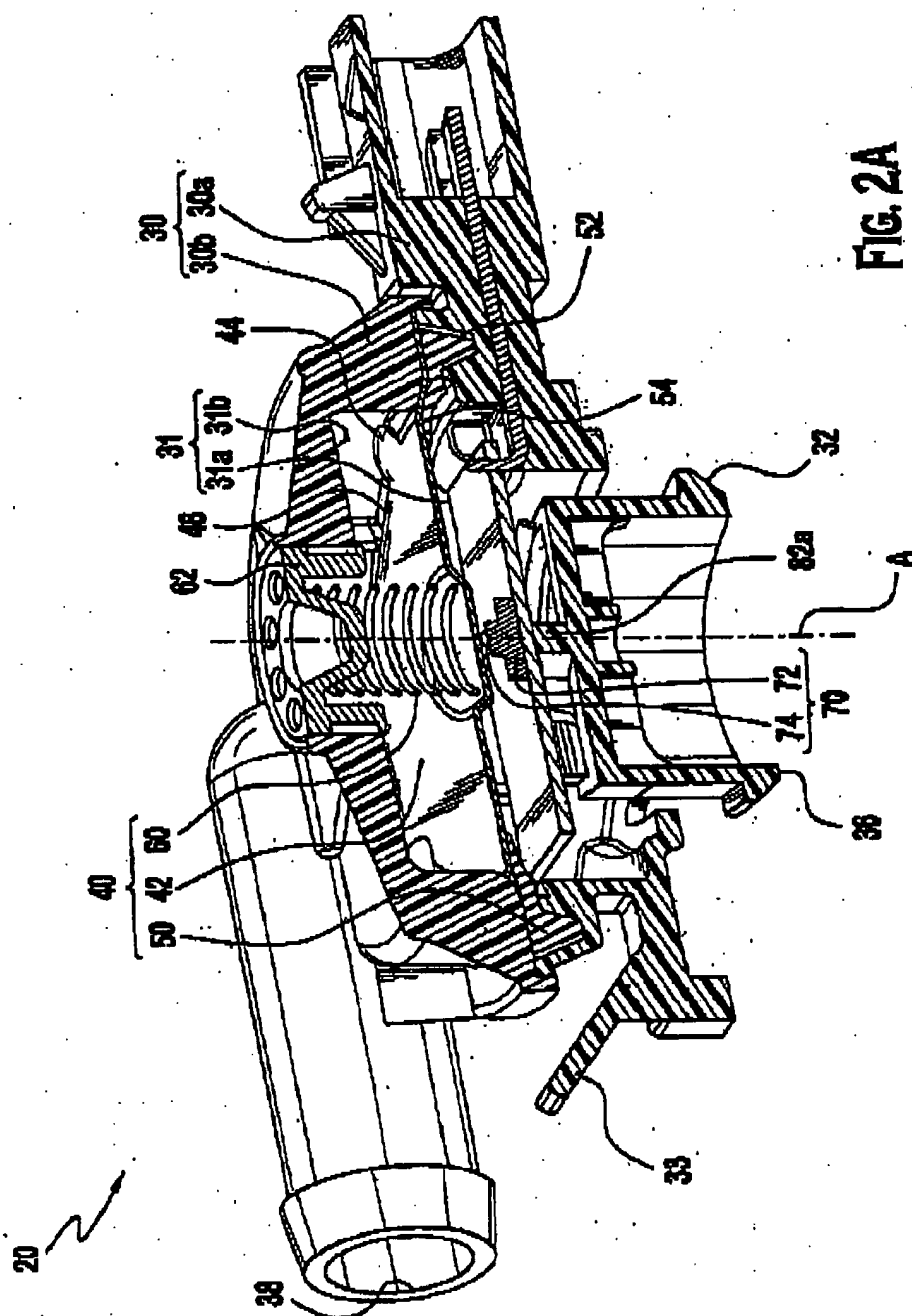

REPLACEMENT SHEET

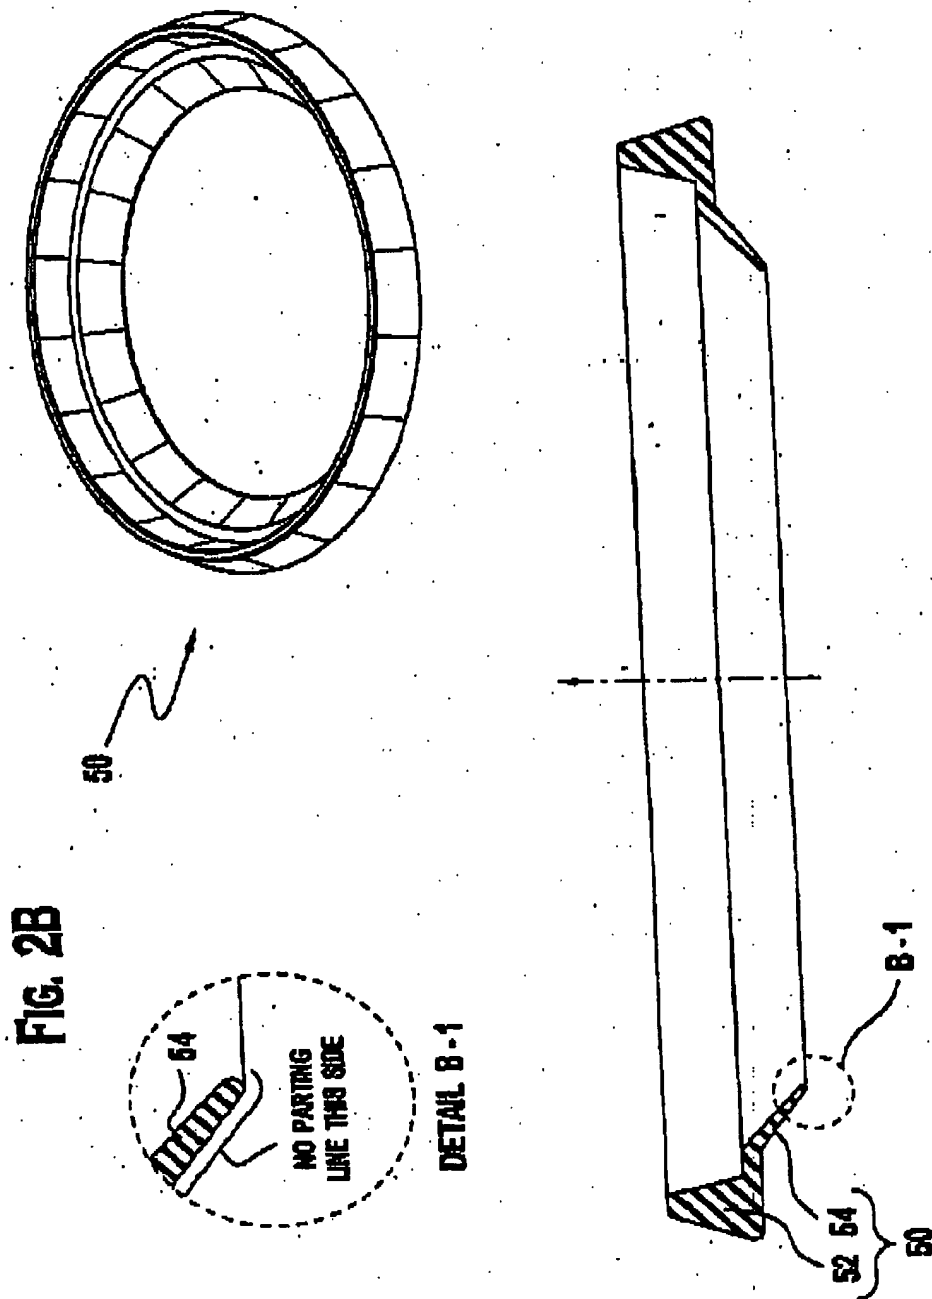

REPLACEMENT SHEET

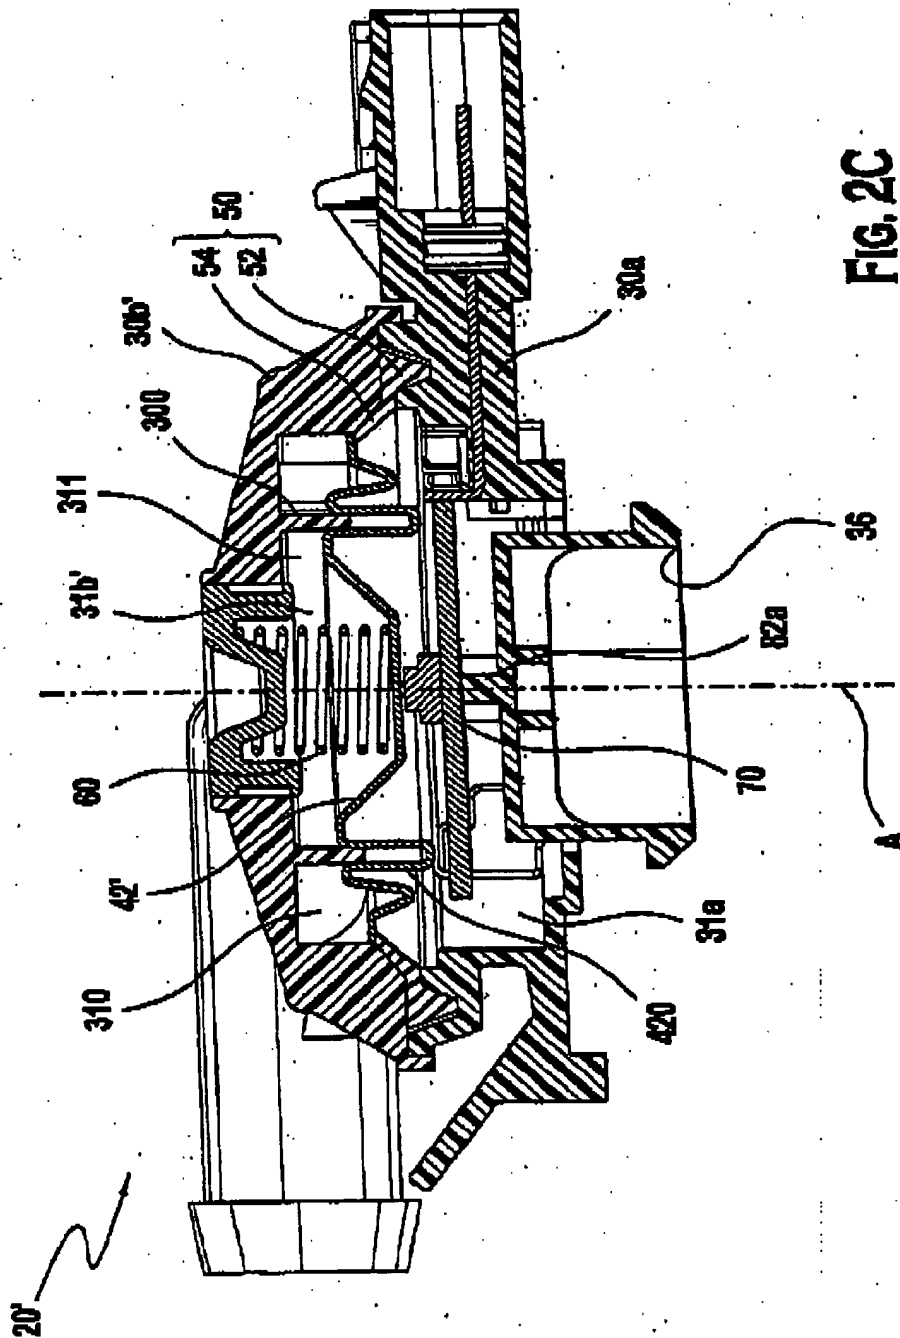


FIG. 2C

REPLACEMENT SHEET

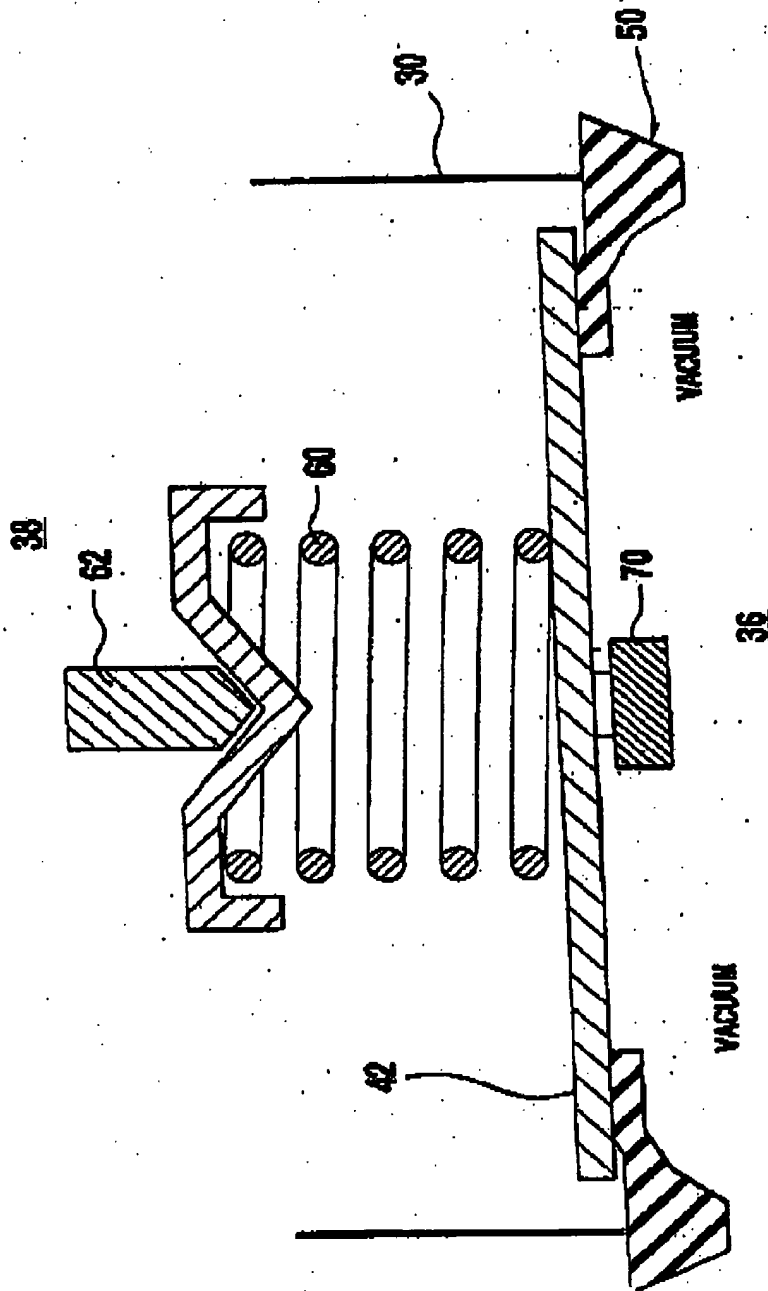


FIG. 3A

REPLACEMENT SHEET


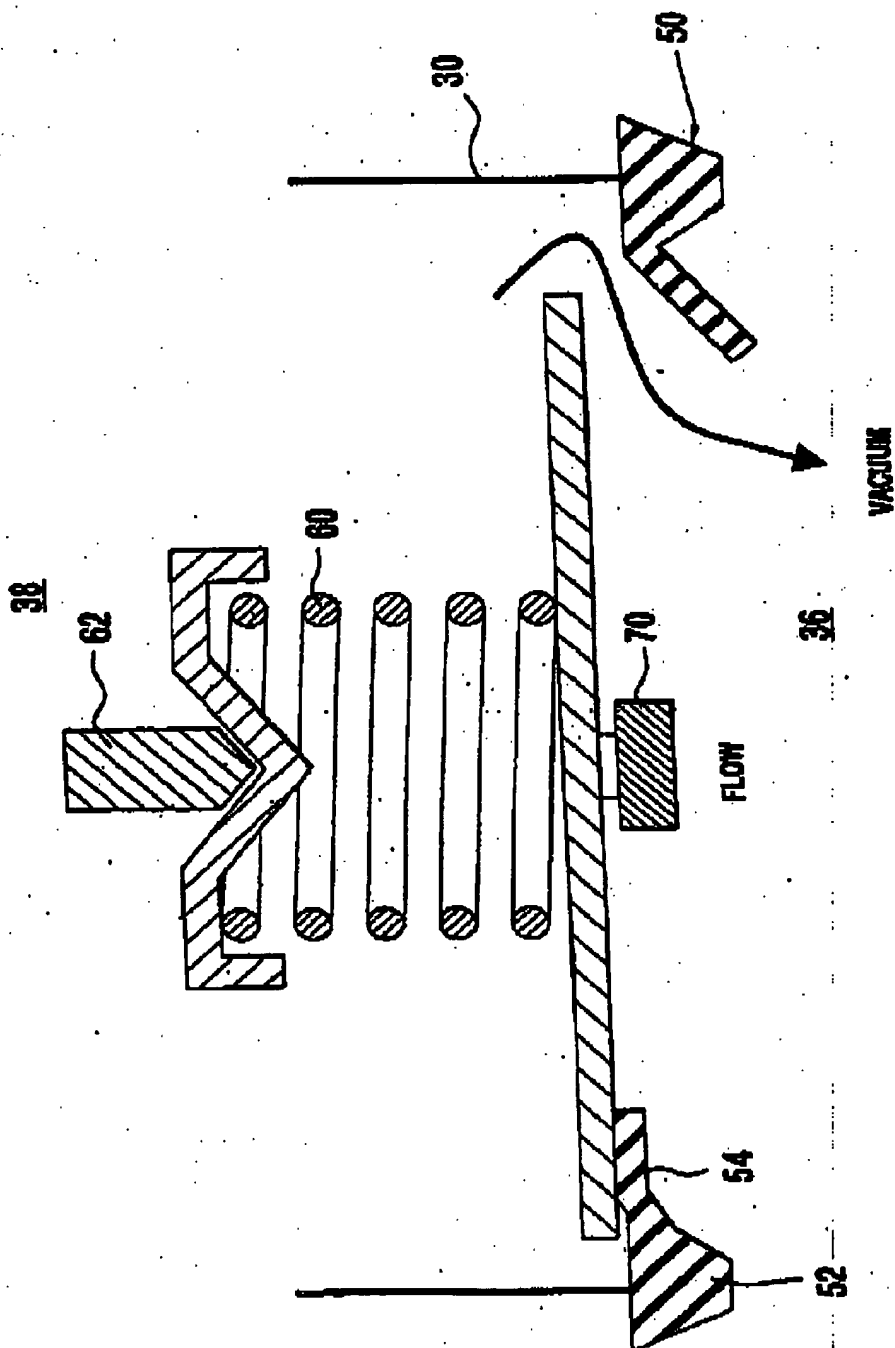


FIG. 3B

REPLACEMENT SHEET

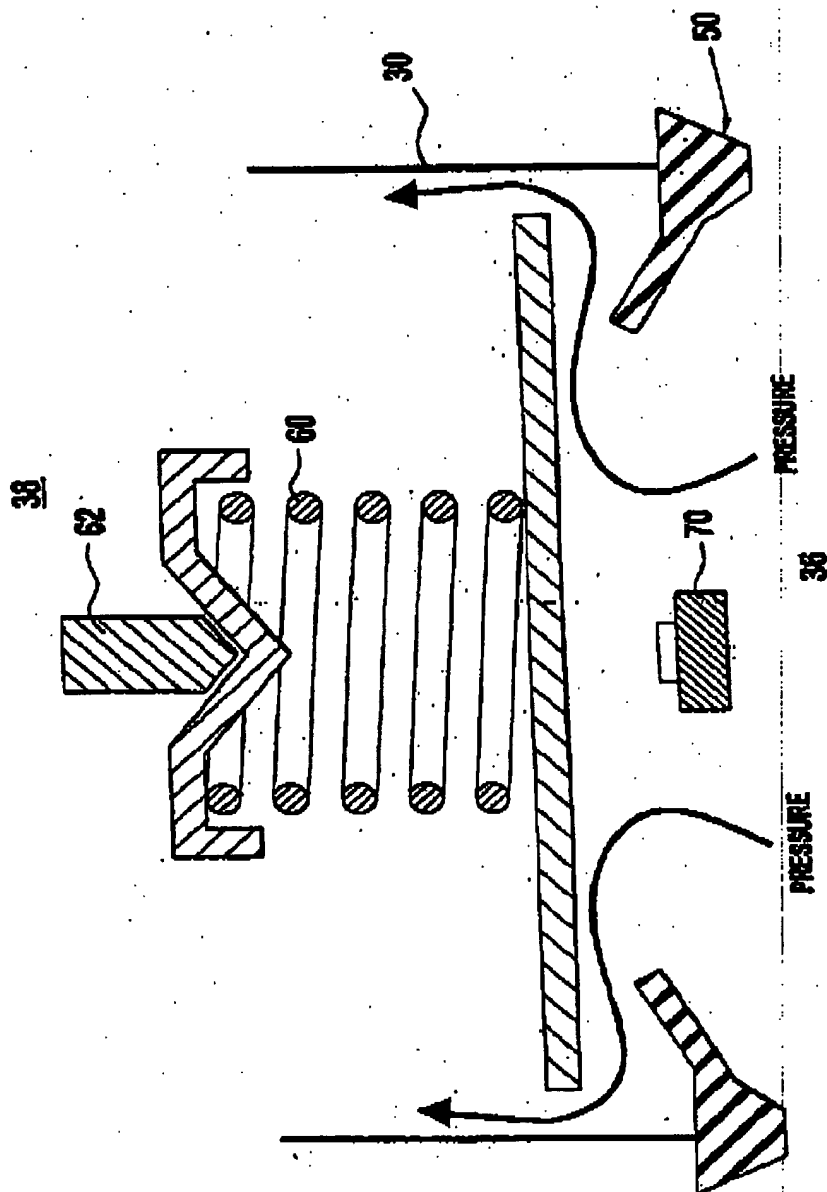

REPLACEMENT SHEET

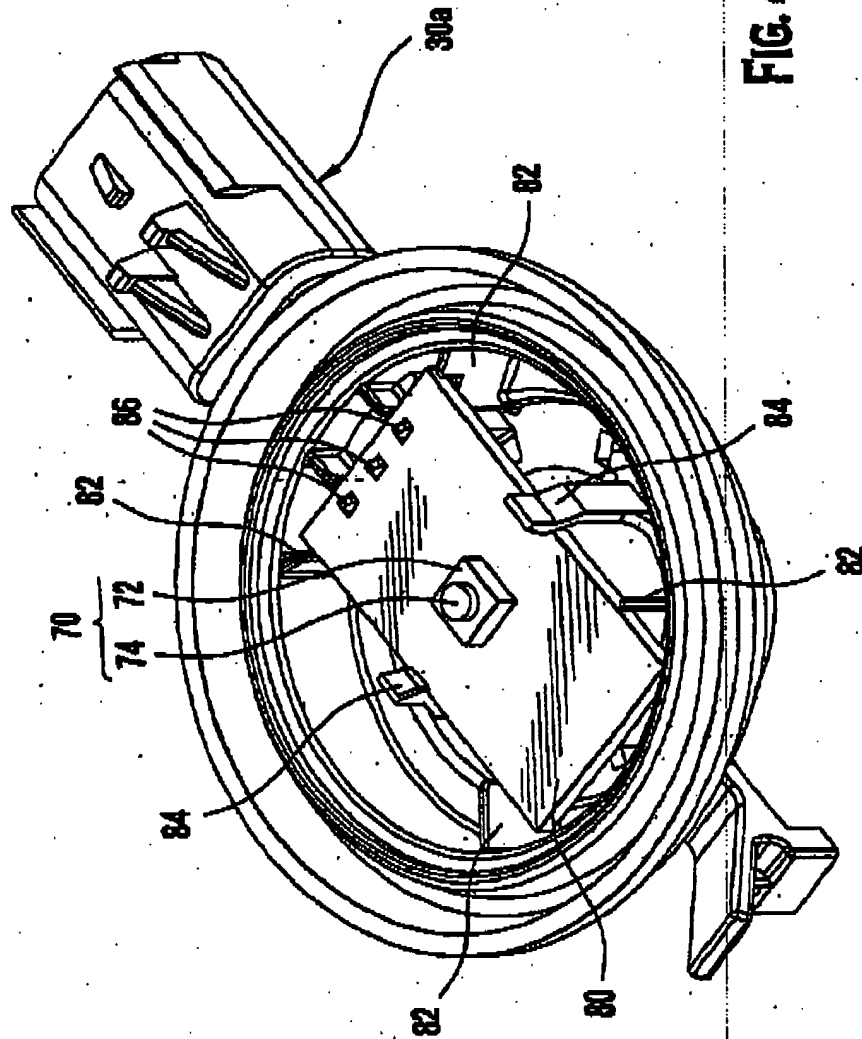


FIG. 4

REPLACEMENT SHEET

FIG. 5A

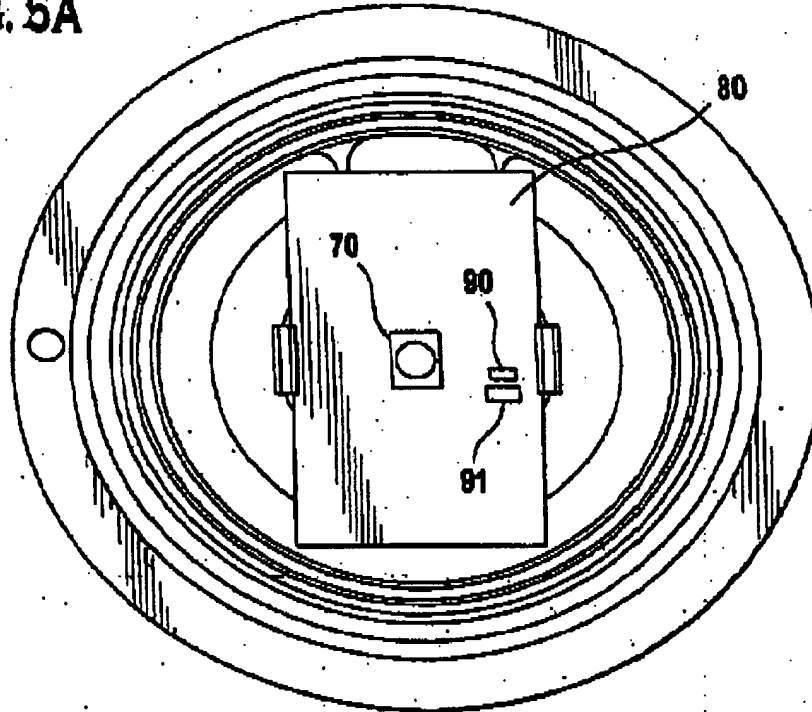


FIG. 5B

STEP CHANGE IN FLOW: 0-80 SLPM
AMBIENT TEMPERATURE: 30 DEGREES C
HEATING RESISTOR: 100% PWM

